

Latch, deadbolt, 2 hook bolts

A fast, easy and economical solution to the traditional stable door. A simple, 'click together' lock system requiring a single door bolt and an accessory kit to create a high value stable door.



Forend: 16 mm
Spindle: 8 mm
Extendable: Yes
Safe-T-Catch: Yes
Operation: Standard



Stable doors using Ferco Rhino 2H and tilt and turn drive gear

Top opening sash

Description	
Door Lock Ferco Rhino 2H 35/92	6-32486-01-0-1
Backset 35 mm, centres 92 mm	
Clamping piece	9-35946-01-0-1
Catch pin	G-11952-00-0-1

Bottom opening sash



Bottom part cut off from bottom of bolt

Description	
Corner transmission 1ML	6-32021-00-0-1
Gear 15 GV (inward opening)	G-22081-00-0-1
Gear 25 GV (outward opening)	G-22343-25-0-1
Handle flat	6-28101-00-0-7
Spindle 7 mm	9-26874-56-0-1
Snapper catch Eurogroove fitting	6-30568-00-0-1
2 screws M 5 x 35	9-13255-35-0-1
Snapper catch none Eurogroove	6-26372-00-0-1
Snapper catch none Eurogroove	K-15436-00-0-1
Packing (acc. to profile)	

(1) Finish: 1 = FerGUard * silver, 7 = white

Note

When cropping the doorbolt ensure that the locking points are fully activated, this will stop any drive rod from showing past the forend when operated.




Corner transmission 1 ML Spindle 7 mm Screws M 5 x 35 Catch pin

Options depending upon profile

ZH gear 6-30774-01-0-1



ZK gear 6-31116-01-0-1

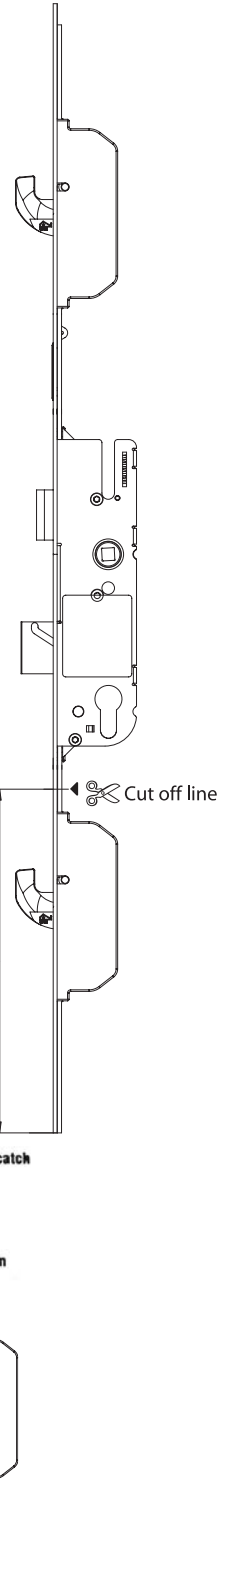

FERCO™ STABLE DOOR